

ISUZU
GIGA
TRACTOR HEAD



**IRIT MAKSIMAL,
TENAGA OPTIMAL**

TKDN
CERTIFIED 

*Gambar pada brosur ini hanya ilustrasi, mungkin ada perbedaan dengan aktual kendaraan
**Mesin common rail pada Isuzu Giga sejak tahun 2011

REAL PARTNER. REAL JOURNEY.


SPEKIFIKASI TEKNIS

SPEKIFIKASI	GVR J	GVR J HP ABS	GVZ K HP ABS	GXZ K ABS
SISTEM PENGGERAK RODA / DRIVE TRAIN				
Sistem Penggerak Roda / Drive Train	4X2	4X2	6X4	6X4
DIMENSI / DIMENSION				
Panjang / Overall Length [OAL]	mm	6,010	6,600	
Lebar / Overall Width [OW]	mm	2,485	2,495	
Tinggi / Overall Height [OH]	mm	3,115		
Jarak Sumbu / Wheelbase [WB]	mm	3,560	3,265 + 1,370	
Julur Depan / Front Overhang [FOH]	mm	1,250		
Julur Belakang / Rear Overhang [ROH]	mm	1,200	715	
Jarak Terendah ke Tanah / Minimum Clearance [HH]	mm	240	250	265
Dimensi Chassis	mm	870 x 275 x 7.5		870 x 305 x 7.8
Jejak Depan / Front Tread [AW]	mm	2,060		
Jejak Belakang / Rear Tread [CW]	mm	1,850		
MESIN / ENGINE				
Model	6HK1-TCN	6HK1-TCS		6NX1-TCS
Tipe / Type	Direct Injection, OHC, 6 Cylinders, Heavy Duty Commonrail, VGS Turbo Intercooler			
Sistem Kontrol Emisi	EURO4 with EGR & DOC			EURO4 with SCR
Diameter x Langkah / Bore x Stroke	mm	115 X 125		
Isi Silinder / Piston Displacement	cc	7,790		
Tenaga Maksimum / Maximum Power	PS/rpm	245 / 2,400	285 / 2,400	350 / 2,000
Torsi Maksimum / Maximum Torque	Kgm/rpm	80.5 / 1,450 - 2,400	90 / 1,450 - 2,400	135 / 1,300-1,700
TRANSMISI / TRANSMISSION				
Model	ES9306A	ES11109DD		MEB9
Perbandingan Gigi / Gear Ratio	Low	-	12.638	10.340
	1st	9.010	8.807	7.125
	2nd	5.270	6.550	5.187
	3rd	3.220	4.768	3.750
	4th	2.040	3.548	2.682
	5th	1.360	2.482	1.900
	6th	1.000	1.846	1.383
	7th	-	1.344	1.000
	8th	-	1.000	0.715
	Rev	8.630	13.210	9.015
Perbandingan Gigi Terakhir / Final Gear Ratio		5.571	5.125	6.143
			6.143	5.571

SPEKIFIKASI	GVR J	GVR J HP ABS	GVZ K HP ABS	GXZ K ABS
BERAT / WEIGHT				
Berat Kosong Kendaraan / Curb Weight	kg	5,560	5,980	7,640
Berat Total Kendaraan / Gross Combination Weight [GCW]	kg	32,700	38,100	
Kapasitas Gardan Depan / Capacity Front Axle	kg	6,000		
Kapasitas Gardan Belakang / Capacity Rear Axle	kg	10,000		20,000
REM / BRAKE				
Tipe/Type	Full Air	Full Air ABS		
Rem Kaki / Service Brake	Full Air dengan Drum Brake	Full Air dengan Drum Brake dilengkapi ABS		
Rem Tangan / Hand Brake	Mekanisme Tuas, dengan Air Valve			
Sistem Pengereman Gas Buang / Exhaust Brake	Ada			
RODA / TYRE				
Ukuran Ban	10.00-R20-16PR		295/80R22.5	
Ukuran Velg	10STUD 20X7.50		10STUD 22.5 X 8,25	
SUSPENSI / SUSPENSION				
Depan / Front	Rigid Suspension dengan Multi Leaf Spring			
Belakang / Rear	Rigid Suspension dengan Multi Leaf Spring		Semi-elliptical alloy steel leaf dengan 6-link torque rod	
LAIN-LAIN / OTHERS				
Kapasitas Tangki / Fuel Tank Capacity	ltr	370		200
Daya Tanjak Maksimum / Maximum Gradeability	%	18	25	30
Kecepatan Maksimum / Maximum Speed	km/h	90	98	83
Aki / Accu	V-Ah	2 x 12 V - 65 Ah		
Alternator	V-A	24 - 60		
Rubber Damper Cabin Suspension	Ada			
Audio Head Unit	Ada			
USB Charging System	Ada			
APAR (Alat Pemadam Api Ringan)	Ada			
MID	Ada			
Air Seat suspension	Ada			
Garansi / Warranty	1 Tahun / 50,000 km		1 Tahun / 100,000 km	

* Untuk meningkatkan mutu dan penyesuaian dengan perkembangan teknologi, spesifikasi dapat berubah sewaktu-waktu tanpa pemberitahuan.
 ** Ilustrasi merupakan contoh sebagian aplikasi di lapangan.

DIMENSI

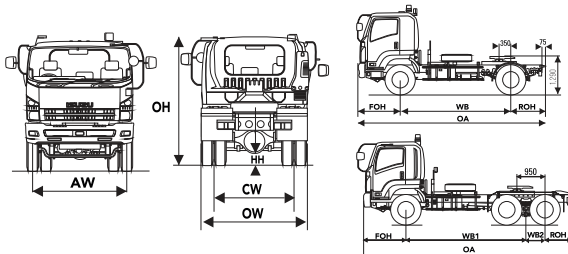

APLIKASI

GVR J & GVR J HP ABS

TANGKI TRAILER



CONTAINER 20 FT



WING BOX



HI BLOW



GVZ K HP ABS

FLAT BED TRAILER



CONTAINER 20 FT



LOW BED TRAILER



TANGKI TRAILER



GXZ K ABS

FLAT BED TRAILER



CONTAINER 40 FT



LOW BED TRAILER



TANGKI TRAILER

